


## U123G10V0/ESD

printed on: 28-10-2024



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 2000$
Flow direction	IN-OUT
Burst $\Delta p$	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

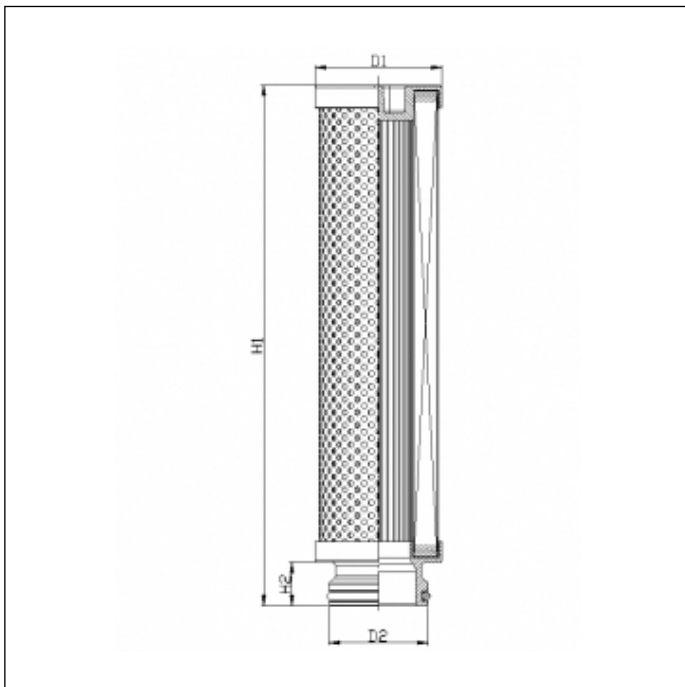

### OVERALL DIMENSIONS

D1	54,0 mm
D2	42,5 mm
H1	526,0 mm
H2	18,5 mm

Technical information may change without notice. Image and drawing are representative only