


U132G06V/ESD

printed on: 12-05-2024



TECHNICAL INFO

| | |
|-------------------|---|
| Media type | INORGANIC FIBERGLASS |
| Efficiency | 5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$ |
| Efficiency 1 | 7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$ |
| Flow direction | IN-OUT |
| Burst Δp | 10 bar |
| Seals | FKM |
| Temperature range | -25°C +120°C |
| Note | ANTI-ESD FILTER ELEMENT |

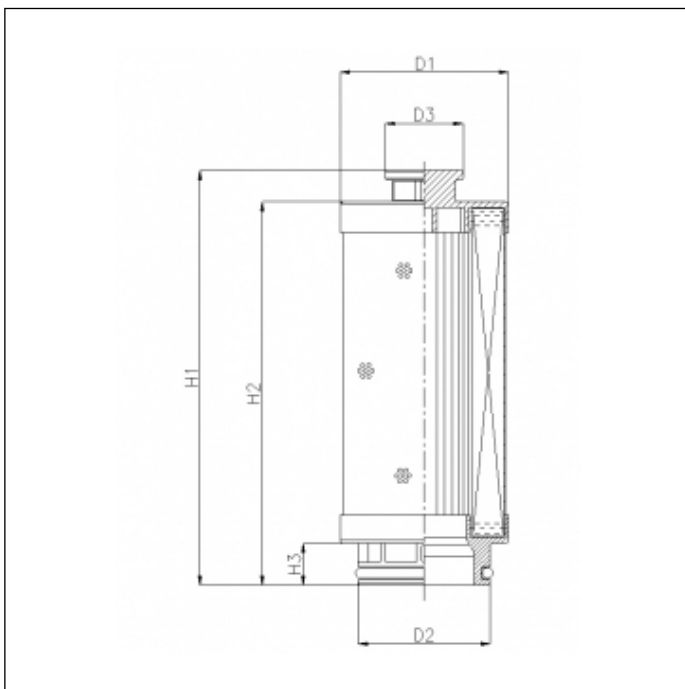

OVERALL DIMENSIONS

| | |
|----|----------|
| D1 | 79,0 mm |
| D2 | 63,5 mm |
| D3 | 25,0 mm |
| H1 | 367,5 mm |
| H2 | 357,5 mm |
| H3 | 14,0 mm |