


## U163G03V/ESD

printed on: 14-07-2024



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	<math> < 4 \mu\text{m}_{(c)} \beta_x \geq 200 </math>
Efficiency 1	<math> 5 \mu\text{m}_{(c)} \beta_x \geq 1000 </math>
Flow direction	IN-OUT
Burst $\Delta p$	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

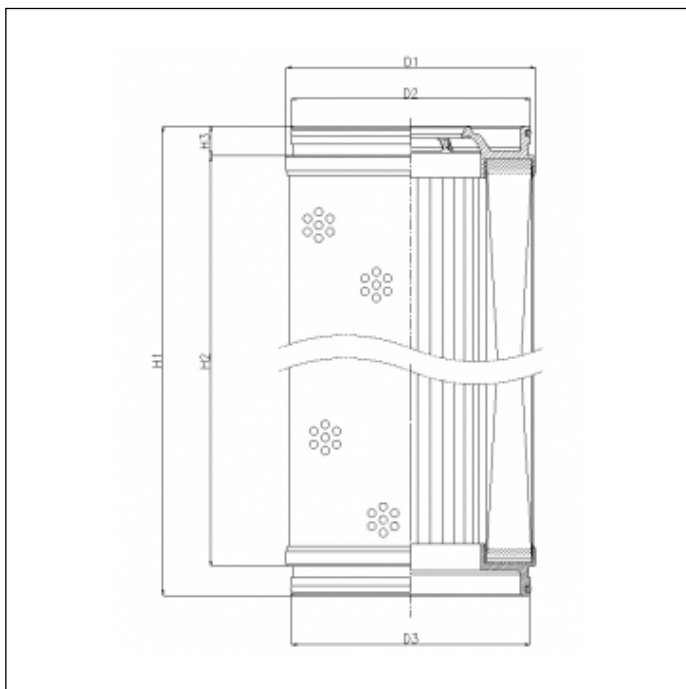

### OVERALL DIMENSIONS

D1	152,5 mm
D2	146,0 mm
D3	146,0 mm
H1	547,0 mm
H2	511,0 mm
H3	18,0 mm