


## U163G06V/ESD

printed on: 14-07-2024



### TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	5 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	7 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	IN-OUT
Burst $\Delta p$	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

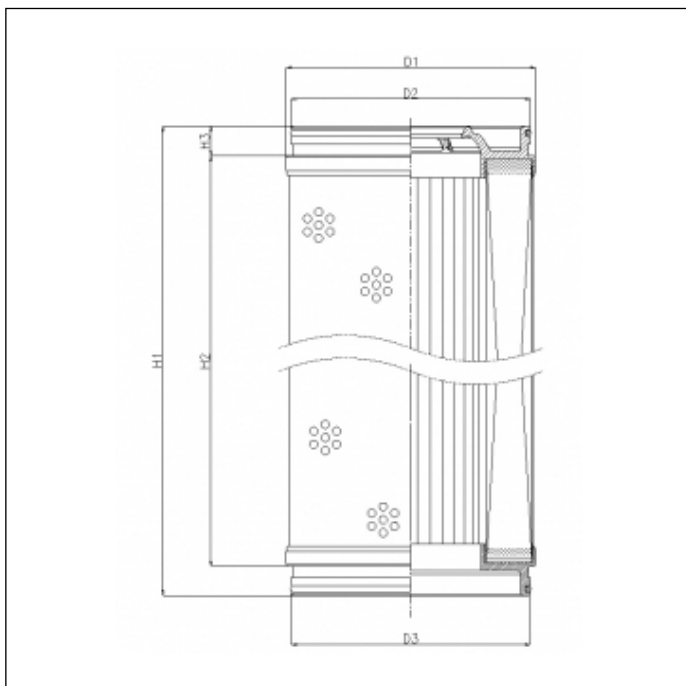

### OVERALL DIMENSIONS

D1	152,5 mm
D2	146,0 mm
D3	146,0 mm
H1	547,0 mm
H2	511,0 mm
H3	18,0 mm