


WG1010

printed on: 05-12-2024



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	15 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	17 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse Δp	20 bar
Seals	NBR
Temperature range	-30°C +100°C

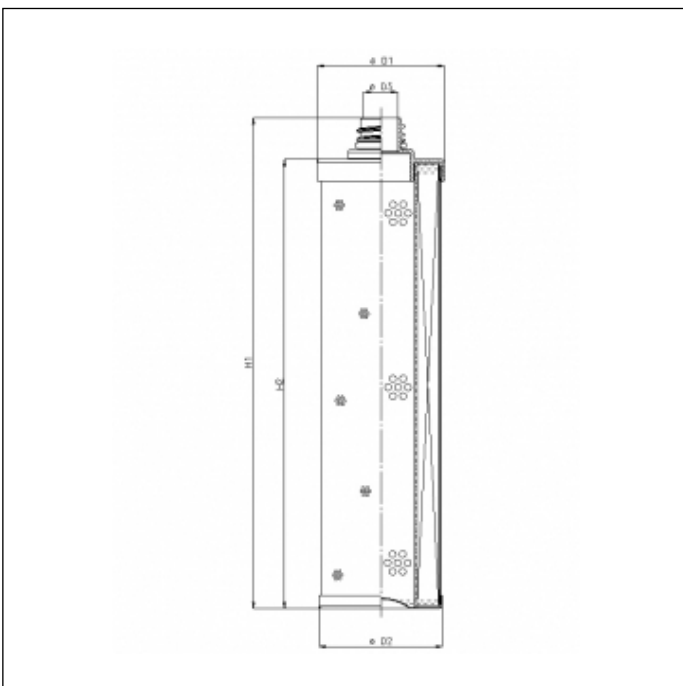

OVERALL DIMENSIONS

D1	58,0 mm
D2	56,0 mm
D3	15,5 mm
H1	184,5 mm
H2	165,5 mm

Technical information may change without notice. Image and drawing are representative only