


## TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 $\mu\text{m}_{(c)}$ $\beta_x \geq 200$
Efficiency 1	12 $\mu\text{m}_{(c)}$ $\beta_x \geq 1000$
Flow direction	OUT-IN
Collapse $\Delta p$	30 bar
Seals	FKM
Temperature range	-25°C +120°C

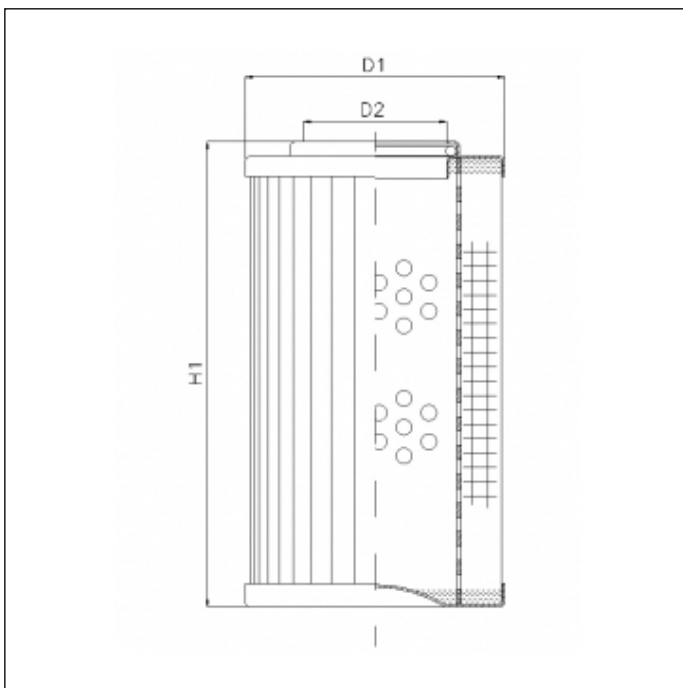

## OVERALL DIMENSIONS

D1	69,0 mm
D2	34,2 mm
H1	127,0 mm